

RO Anywhere

The RO Anywhere from Pure Rinse Systems is designed for versatility, portability and performance in one user-friendly, service-friendly system — at an unbeatable price. Its modular design allows you to easily add capacity as your needs grow. The optional deionization (DI) cartridge is available to further purify the RO water for the most demanding spot-free cleaning applications and quickly mounts directly to the frame for a space efficient set-up.

Use your unit as a stationary installation in your shop or as a mobile system in your trailer, van or truck. Choose the either 900, 1800 or 2700 gpd (1.9 gpm, 77°F water) capacity unit for your specific needs.




FEATURES

- High Rejection RO membranes remove 99% of tap water impurities
- Triple pre-filtration for excellent membrane and system protection and long service intervals
- High-efficiency pump system is designed to maximize membrane life, quality and pure water production rate.
- Epoxy coated steel frame made with modular components for fast and easy servicing
- Vibration mounting of each frame platform for quiet, reduced-vibration operation
- High efficiency 115 VAC pumping system
- Easy-to-add DI cartridge option
- "Safety First" design, GFCI on each power cord

SPECIFICATIONS

- Capacity: 900, 1800, 2700 gpd (water @ 77°F)
- Pre-filter: 10 x 4.25", 5µ micron, Pleated
- Carbon filter: 10 x 4.0" Carbon
- Final filter: 10 x 4.25", 1micron, Depth
- Membranes: Thin Film Composite, High Rejection
- Housing: PVC and Glass-filled polyester resin
- Pump: PUMPTEC Model 348, 2.5 gpm at 200 psi
- Motor: 1/2 hp, 115/230 vac, 7.2/3.6 fla, 1.15 sf
- Regulator: PUMPTEC 500-200, adjustable 0-200 psi
- Gauges: Industrial grade, Glycerine filled, SS bodies
- Size: 15d x 30w x 37"h
- Weight: 150 lbs dry

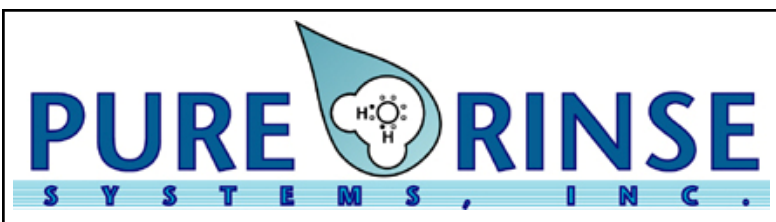

Pure Rinse Systems, Inc
13915-H Radium Street NW
Ramsey, MN 55303
Ph: 763.433.0303
Fax: 764.433.0404
www.purerinse.com