

RO Water Wagon

The RO Water Wagon from Pure Rinse Systems is a self-contained portable water storage and distribution system for use with any of our pure water systems. The tank holds 50 gallons of water; the distribution system can provide flow to multiple applications and allows hose lengths up to 600 feet. The cart is only 24" wide and will fit through standard doorways.

The optional auto-fill switch can be used to power an RO system and shut it down upon achieving system water capacity for total system independence. The optional 12 VDC power system allows remote operation.




FEATURES

- High efficiency pump system is designed to maximize utility and minimize power usage. The system allows 12 volt operation with optimum charging intervals.
- Epoxy coated steel frame made with modular components for fast and simple servicing.
- Vibration mounting of each frame platform for quiet, reduced-vibration operation
- 120 VAC pumping system — 12 VDC pumping system is optional
- Hose length is 300 feet and is non-kinking, non-marking, abrasion resistant and rated for 800 PSI
- Hose reel features a fold-away handle, brake and lock as standard equipment
- Power caddy battery box option has carry handle, power level indicator and auxiliary sockets
- Quick-dump valve quickly empties tank for a fast move to the next job site
- "Safety First" design GFCI on the power cord

SPECIFICATIONS

- Tank: 50 gallon capacity with level indicators
- Pump: PUMPTEC Model 348-190, 2.5 gpm at 200 psi
- Motor: 1/2 hp, 115/230 vac, 7.2/3.6 fla, 1.15 sf
- Regulator: PUMPTEC 500-200, adjustable 0-200 psi
- Gauge: Industrial grade, Glycerine filled, SS body
- Hose: 3/8" id, 300 ft, 800 psi rated
- Hose Reel: 18" diameter, folding handle, brake and lock included
- Pressure Switch: Dual contact, 250v and 25a rated
- Size: 58l x 24w x 52"h
- Weight: 250 lbs dry

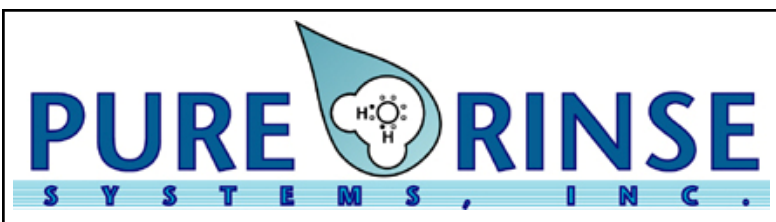

Pure Rinse Systems, Inc
13915-H Radium Street NW
Ramsey, MN 55303
Ph: 763.433.0303
Fax: 764.433.0404
www.purerinse.com